


< 波形データ >

品番 : BPF - U18ATK


Tr1 S21 Log Mag 5.000dB/ Ref 0.000dB [RT]

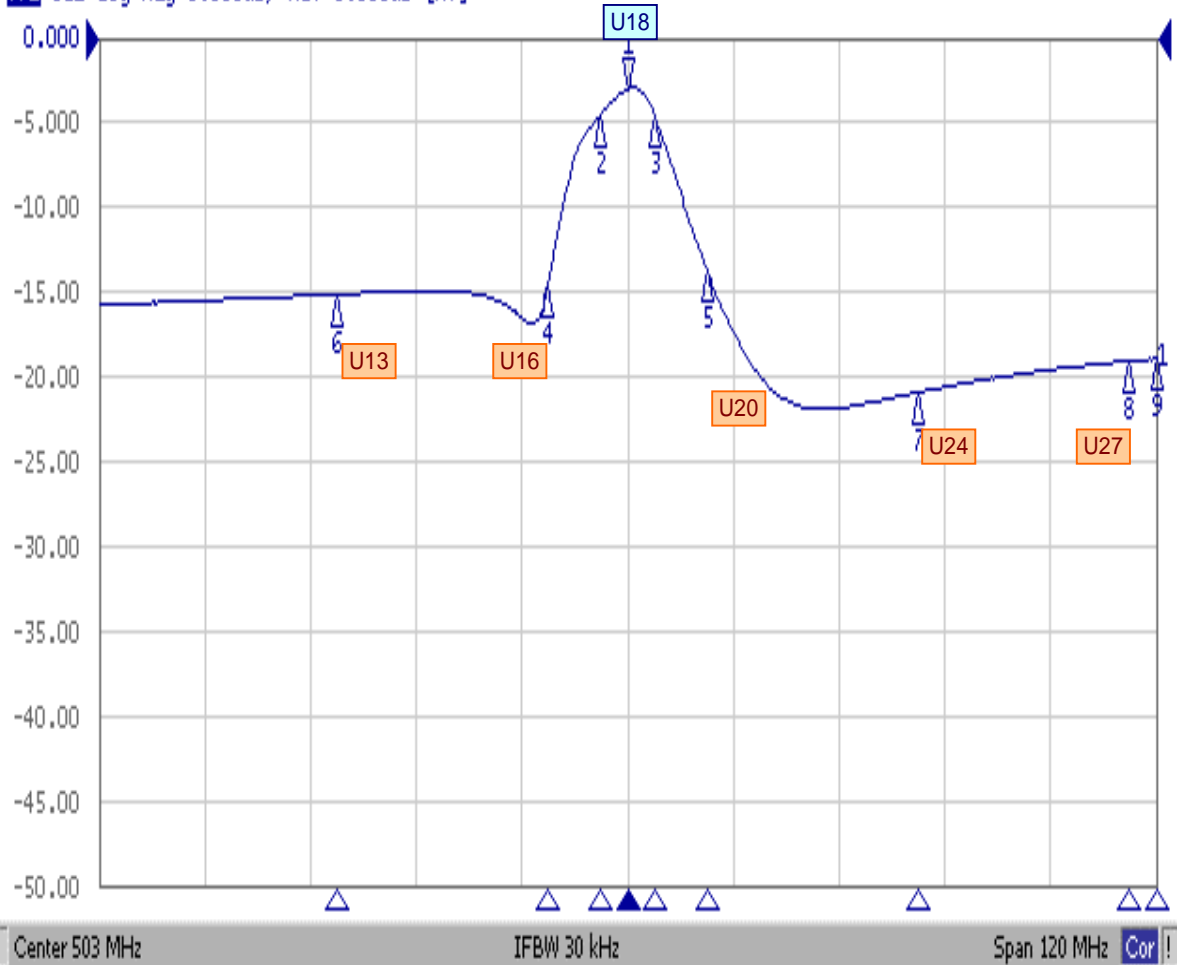

Ch1	Tr1	S21	>1	503.00000	MHz	-2.9801	dB
Ch1	Tr1	S21	2	500.00000	MHz	-4.4667	dB
Ch1	Tr1	S21	3	506.00000	MHz	-4.4680	dB
Ch1	Tr1	S21	4	494.00000	MHz	-14.527	dB
Ch1	Tr1	S21	5	512.00000	MHz	-13.681	dB
Ch1	Tr1	S21	6	470.00000	MHz	-15.131	dB
Ch1	Tr1	S21	7	536.00000	MHz	-20.910	dB
Ch1	Tr1	S21	8	560.00000	MHz	-19.048	dB
Ch1	Tr1	S21	9	563.00000	MHz	-18.923	dB


< 広帯域データ >

S21 Log Mag 10.00dB/ Ref 0.000dB [RT]

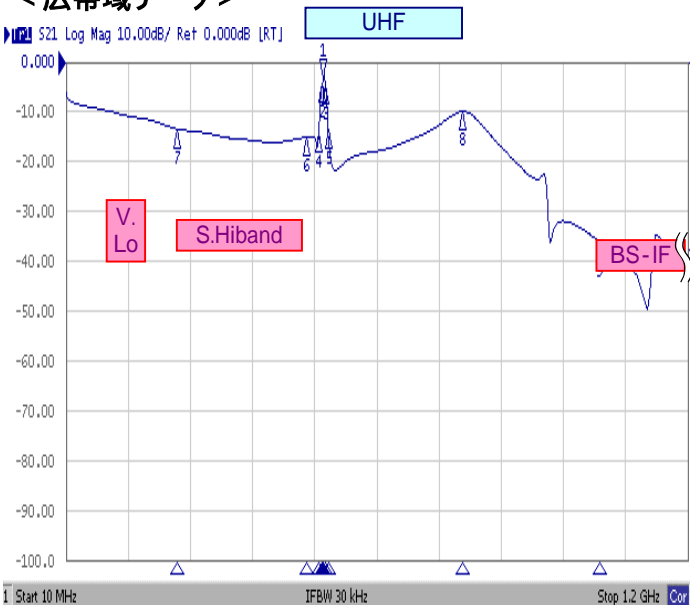

製品の特性は製品毎に若干のバラツキが御座います。

外観参考イメージ

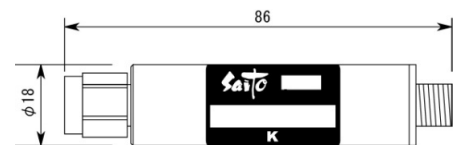

専用防水キャップを付属します。



御参考特性データ

Saito Comware Co., Ltd.

2016/08/22